

Pottery Barn

Teardrop Chandelier

Important Safety Instructions:

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- This fixture has been rated for up to (1) 100-watt maximum standard Type A bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

Pre-assembly:


- Remove all parts and hardware from the box and lay out on a clear workspace, along with any plastic protective packaging. Do not discard any contents until assembly is completed to avoid accidentally discarding small parts or hardware.
- Use the parts and hardware lists to identify and separate each of the components included.

To Install You Will Need:

- Electrical tape

Parts Enclosed:

- (A) Plastic wire connector-2pcs
- (B) Mounting plate-1pc
- (C) Mounting screw-2pcs
- (D) Grounding screw-2pcs
- (E) Hexnut-1pc
- (F) Screw collar loop-1pc
- (G) Canopy -1pc
- (H) Threaded ring-1pc
- (I) Crystal -5 sets
- (J) Body-1pc
- (K) Crystal -26 sets

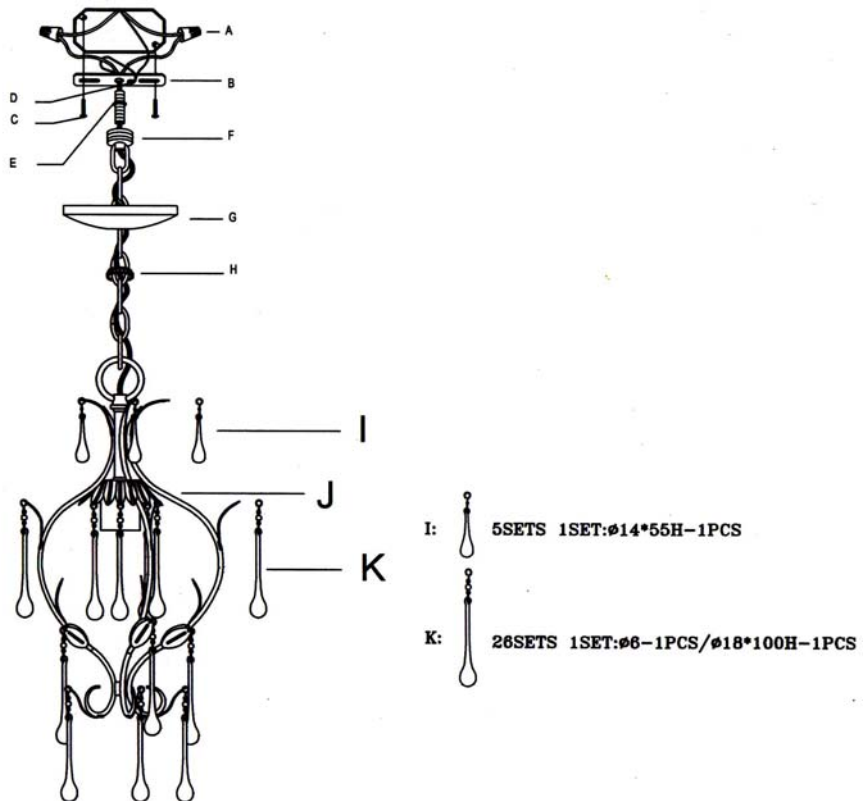

Installation Instructions:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. Carefully unpack all fixture parts and hardware and lay them out on a clear workspace.
3. Gently pull wiring down from ceiling junction box and allow it to hang.
4. Remove the mounting plate (B) from the canopy (G) by turning screw collar loop clockwise.
5. Carefully inspect the pendant's fixture wires. The NEUTRAL FIXTURE WIRE has very fine ridges molded into its plastic covering. The HOT FIXTURE WIRE has a smooth covering. The bare copper wire is the GROUND WIRE.

6. Attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (A) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet box DOES NOT have a GROUND WIRE, insert the grounding screw (D) into the mounting plate (B) facing DOWN, and wrap the fixture's bare ground wire around the grounding screw. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
7. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white). Fasten each together with a plastic wire connector (A) and wrap the connection with electrical tape. Be sure no strands are exposed.
8. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black). Fasten each together with a plastic wire connector (A) and wrap the connection with electrical tape. Be sure no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; Otherwise, SAFETY WILL BE COMPROMISED.
9. Gently tuck the wire connections neatly into the ceiling junction box.
10. Attach the mounting plate (B) to the ceiling outlet box using the enclosed mounting screws (C). Tighten the hexnut (E) onto the mounting plate.
11. Pull the canopy (G) up over the mounting plate until it is flush with the ceiling.
12. Attach screw collar loop (F) to the canopy (G) by turning in a clockwise direction to secure.
13. Attach threaded ring (H) onto screw collar loop (F) to secure canopy (G).
14. Hang crystals (I, K) onto the chandelier body (J).
15. Insert bulb (not included) into the socket.
16. Restore power to junction box and test fixture.
17. Assembly is complete.

Care Instructions:

Wipe clean with a soft, dry cloth or static duster.

Avoid the use of harsh chemicals and abrasive cleaners as they may cause damage to the finish.

thank you for your purchase
stores | catalog | www.potterybarn.com