

P O T T E R Y B A R N

Display Shelf Glass 20In Mounting Instructions

This item includes two metal Brackets and one glass shelf.

Max. Load: Maximum total weight capacity for this product is 20 pounds (9 Kg).

Hardware Included: (4) Snap-skru, (4) Screws.

Tools Needed: Phillips Screwdriver, Pencil, Stud-Finder, Level, Tape measure

Note: Assembly by two people recommended. Open the box safely and unpack all the included items. Do not discard packing until assembly is completed.

1. Hold the Bracket upright and level against a wall at a desired mounting location. Use a pencil to mark the wall through each of the two mounting holes. Set the bracket aside.

2. The provided Snap-screw cannot penetrate wood studs. Therefore we have to determine if any of the two marks of Step (2) happens to align with a wall stud. Use a stud-finder to determine this. If any mark does align with a stud, use a screwdriver to secure a provided screw into the wall at this mark when instructed to do so below.


3. For marks that do not align with a wall stud, use a screwdriver to install a provided Snap-screw into the wall at the mark. Engage the head of the Snap-screw with the screwdriver and position the Snap-screw's tip at the mark. Rotate the Snap-screw clockwise while pushing it firmly into the wall. The Snap-screw will automatically drive itself into the wall. Continue rotating until the wide end of the Snap-screw becomes even with the wall surface. Do not over-tighten.

4. Now hang the bracket to the wall so that the two holes in the bracket align with either installed Snap-screw or a stud. Use a screwdriver to secure a screw through each hole and into the installed Snap-screw or stud. Rotate the screws clockwise until tight.

5. Similarly hang second bracket on the wall & **ensure bracket are well inside the width of glass shelf to evenly support the weight of the glass shelf** .(As shown in Illustration).

6. Now place glass shelf on installed brackets securely.

The hardware included with this item is meant for drywall mounting only. If your wall is made from another material such as concrete or plaster, please consult your local hardware store for assistance in selecting the correct hardware.

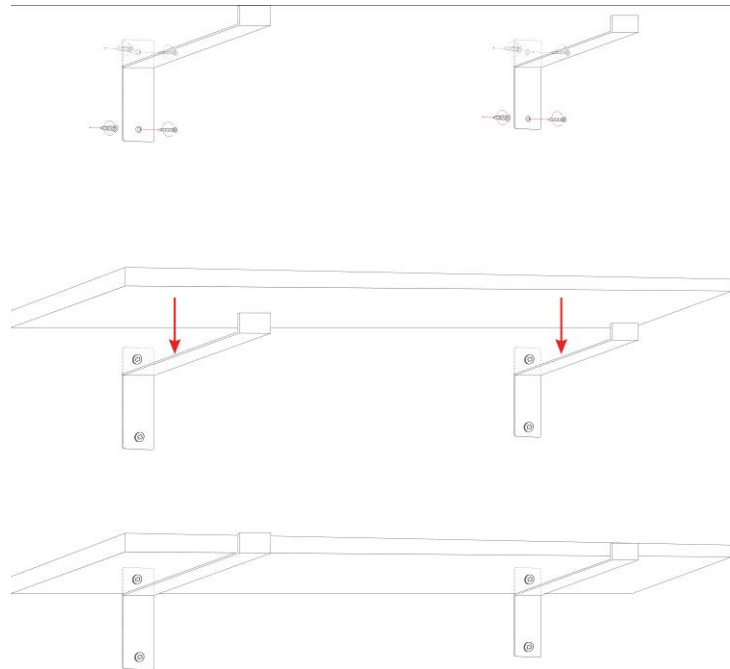

User's Instructions:

- Please ensure the placement distance in between two mounting brackets should range within 12" – 14".
- The placement of glass shelf should be equal from both ends to avoid any slipping from side wall brackets.



WARNING!

DO NOT MOUNT THIS ITEM ABOVE CRIBS, BEDS, or CHANGING TABLES.

Thank you for your purchase!

Stores | Catalog | www.potterybarn.com